

LAW OFFICES  
**SUGHRUE, MION, ZINN, MACPEAK & SEAS, PLLC**

2100 PENNSYLVANIA AVENUE, N.W.  
WASHINGTON, DC 20037-3213  
TELEPHONE (202) 293-7060  
FACSIMILE (202) 293-7860  
www.sughrue.com

August 28, 2000

BOX PATENT APPLICATION  
Assistant Commissioner for Patents  
Washington, D.C. 20231

Re: Application of Hisashi ISHIKURA, Hirofumi TATSUKAWA, Masaru FUKU,  
Keiichi ENOKI, Toru MORITA, Fumitaka SATOU, and Koji NAGAO  
VEHICLE KEY SYSTEM  
Our Reference: Q60517

Dear Sir:

Attached hereto is the application identified above including 26 pages of the specification, claims, and abstract, three (3) sheets of formal drawings (Figures 1-3), executed Assignment and PTO 1595 form, and executed Declaration and Power of Attorney. Also enclosed is the Information Disclosure Statement.


The Government filing fee is calculated as follows:

Total claims	19 - 20	=		x	\$18.00	=	\$0.00
Independent claims	2 - 3	=		x	\$78.00	=	\$0.00
Base Fee							\$690.00
<b>TOTAL FILING FEE</b>							<b>\$690.00</b>
Recordation of Assignment							\$40.00
<b>TOTAL FEE</b>							<b>\$730.00</b>

Checks for the statutory filing fee of \$690.00 and Assignment recordation fee of \$40.00 are attached. You are also directed and authorized to charge or credit any difference or overpayment to Deposit Account No. 19-4880. The Commissioner is hereby authorized to charge any fees under 37 C.F.R. §§ 1.16 and 1.17 and any petitions for extension of time under 37 C.F.R. § 1.136 which may be required during the entire pendency of the application to Deposit Account No. 19-4880. A duplicate copy of this transmittal letter is attached.

Priority is claimed from March 21, 2000, based on Japanese Application No. 2000-078941. The priority document is enclosed herewith.

Respectfully submitted,  
SUGHRUE, MION, ZINN,  
MACPEAK & SEAS, PLLC  
Attorneys for Applicant

By:   
Robert J. Seas, Jr.  
Registration No. 21,092

## VEHICLE KEY SYSTEM

## BACKGROUND OF THE INVENTION

## Field of the Invention

5           The present invention relates to a vehicle key system for  
verifying the identity of fingerprint information captured and  
for controlling pieces of equipment in a vehicle according to  
the verification result. More particularly, it relates to a  
vehicle key system capable of making it possible for a user  
10   owning a plurality of vehicles to manipulate a specific vehicle.

## Description of the Prior Art

          In a conventional vehicle key system as disclosed in  
Japanese patent publication (TOKKOUHEI) 5-22791 or Japanese  
patent application publication (TOKKAIHEI) 11-93478,  
15   fingerprint information captured by a sensor or the like is  
transmitted from a mobile transmitter to a receiver mounted on  
a vehicle and the fingerprint information is verified against  
previously stored fingerprint information. The vehicle key  
system can release the lock of doors only if they match.

20           A problem with a conventional vehicle key system  
constructed as above is that even when an authorized user owning  
a plurality of vehicles attempts to manipulate a specific  
vehicle using his or her own mobile transmitter, the  
transmission of fingerprint information from the mobile  
25   transmitter can make another vehicle key system for another  
vehicle of his or her own operate, thereby imposing an  
inconvenience on the user. In other words, when the user  
manipulates the mobile transmitter to release the lock of doors  
of a specific vehicle, the transmission of fingerprint  
30   information from the mobile transmitter can release the lock

of doors of another vehicle. Needless to say, this misoperation is undesirable from the viewpoint of the security.

#### SUMMARY OF THE INVENTION

5       The present invention is proposed to solve the above problems. It is therefore an object of the present invention to provide a vehicle key system including a mobile transmitter for transmitting fingerprint information captured together with an identifier specific to the mobile transmitter, and a  
10 receiver for verifying the fingerprint information and the system-specific identifier against a list of pieces of previously stored fingerprint information and an identifier stored therein, and for controlling pieces of equipment in a vehicle according to the verification result, thereby making  
15 it possible to allow a user to manipulate only the vehicle when the user manipulates the mobile transmitter corresponding to the vehicle.

In accordance with one aspect of the present invention, there is provided a vehicle key system for verifying identity  
20 of fingerprint information about a user's fingerprint and for controlling pieces of equipment in a vehicle according to a verification result, the system comprising: a transmitter including a fingerprint information capturing unit for capturing fingerprint information from a user's fingerprint,  
25 and a transmit unit for transmitting the fingerprint information captured by the fingerprint information capturing unit together with a system-specific identifier; and a receiver disposed in the vehicle, including a receive unit for receiving the fingerprint information and the identifier transmitted from  
30 the transmit unit of the transmitter, a verification unit for

verifying the received fingerprint information against a list of pieces of previously stored fingerprint information, and for verifying the received identifier against a previously stored identifier, and a control unit for controlling the pieces of equipment in the vehicle according to verification results from the verification unit.

In accordance with another aspect of the present invention, there is provided a vehicle key system for verifying identity of fingerprint information about a user's fingerprint and for controlling pieces of equipment in a vehicle according to a verification result, the system comprising: a transmitter including a fingerprint information capturing unit for capturing fingerprint information from a user's fingerprint, and a transmit unit for transmitting information including at least one of the fingerprint information captured by the fingerprint information capturing unit and a system-specific identifier; a receiver disposed in the vehicle, including a receive unit for receiving the information from the transmit unit of the transmitter, a verification unit for, when the received information includes the captured fingerprint information, verifying the received fingerprint information against a list of pieces of previously stored fingerprint information, and for, when the received information includes the system-specific identifier, verifying the received identifier against a previously stored identifier, and a control unit for controlling the pieces of equipment in the vehicle according to at least a verification result from the verification unit; and a transmission information selecting unit for selecting, as the information to be transmitted by the transmit unit, only the fingerprint information, only the

system-specific identifier, and both of them, according to a manipulation performed by the user.

Preferably, the transmitter includes a display unit for displaying kinds of the information selected by the

5 transmission information selecting unit.

The transmission information selecting unit can include an operation unit that is manipulated by the user when selecting the information to be transmitted by the transmit unit of the transmitter. The transmitter can further comprise a selection

10 information holding unit for holding selection information indicating the selected information, and the receiver further comprises a selection information holding unit for holding selection information indicating the selected information.

Either of the transmitter and the receiver includes the  
15 operation unit. As an alternative, both of them can include the operation unit.

Preferably, an operation unit intended for operating a piece of equipment disposed in the vehicle also serves as the operation unit. The equipment can be a navigation device. As  
20 an alternative, a pedal disposed in the vehicle also serves as the operation unit.

If the verification unit previously stores no fingerprint information, when the received information includes the system-specific identifier, the verification unit can perform  
25 only the verification of the received identifier against a previously stored identifier.

Further objects and advantages of the present invention will be apparent from the following description of the preferred embodiments of the invention as illustrated in the accompanying  
30 drawings.

## BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram showing the structure of a vehicle key system according to a first embodiment of the present invention;

Fig. 2 is a block diagram showing the structure of a vehicle key system according to a second embodiment of the present invention; and

Fig. 3 is a state transition diagram showing a transition between processing modes.

## DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

## Embodiment 1

Referring next to Fig. 1, there is illustrated a block diagram showing the structure of a vehicle key system according to a first embodiment of the present invention. In the figure, reference numeral 1 denotes a mobile transmitter, and numeral 2 denotes a vehicle. The mobile transmitter 1 is provided with a fingerprint sensor 11 for capturing fingerprint information from a user's fingerprint, an identifier storage unit 12 for storing an identifier specific to the mobile transmitter 1, an encode unit 13 for encoding the fingerprint information and the system-specific identifier using a predetermined encoding method to transform them into encoded transmission data, and a transmit unit 14 for radiating radio waves modulated with the transmission data by way of an antenna 15 to transmit the transmission data.

The vehicle 2 is provided with a receiver 21 for receiving the transmission data from the mobile transmitter 1, for verifying the identity of the user based on the transmission

data, and for controlling pieces of equipment in the vehicle, an engine start/stop control unit 22, as a piece of equipment, for controlling an engine according to the verification result from the receiver 21, a door lock/unlock control unit 23, as  
5 a piece of equipment, for controlling the lock of doors according to the verification result from the receiver 21, and a trunk opening control unit 24, as a piece of equipment, for controlling the lock of a trunk according to the verification result from the receiver 21.

10 The receiver 21 is provided with a receive unit 32 for demodulating the radio waves received by way of an antenna 31 to extract the transmission data from them, a decode unit 33 for decoding the extracted transmission data to transform it to the fingerprint information and the identifier, a  
15 fingerprint information holding unit 34 for temporarily holding the fingerprint information, and an identifier holding unit 35 for temporarily holding the identifier.

The receiver 21 further includes a feature extraction unit 36 for extracting features from the fingerprint  
20 information held by the fingerprint information holding unit, a feature storage unit 37 for storing a plurality of sets of features of authorized users' fingerprints, a feature verification unit 38 for verifying the features extracted from the fingerprint information held by the fingerprint information  
25 holding unit against the plurality of sets of previously stored features of authorized users' fingerprints, an identifier storage unit 39 for storing a system-specific identifier, an identifier verification unit 40 for verifying the received identifier held by the identifier holding unit against the  
30 identifier stored in the identifier storage unit 39, and a

comprehensively determination unit 41 for determining whether or not the user manipulating the mobile transmitter 1 is an authorized user and whether or not the manipulation is directed toward the vehicle 2, according to the verification result from the feature verification unit 38 and the verification result from the identifier verification unit 40. A fingerprint verification unit 51 consists of the feature verification unit 38, the identifier verification unit 40, and the comprehensively determination unit 41.

The receiver 21 also comprises a communications unit 42 for furnishing control signals to the engine start/stop control unit 22, the door lock/unlock unit 23, and the trunk opening control unit 24, respectively, according to the determination results from the comprehensively determination unit 41.

In operation, when the user touches the fingerprint sensor 11 of the mobile transmitter 1 firmly with a finger, the fingerprint sensor 11 captures fingerprint information from the fingerprint of the user's finger and then furnishes it to the encode unit 13. The encode unit 13 reads the system-specific identifier from the identifier storage unit 12. The encode unit 13 then encodes the fingerprint information and the identifier using a predetermined encoding method to transform them to encoded transmission data, and furnishes the transmission data to the transmit unit 14. In this case, the encode unit 13 can transform the fingerprint information and the identifier to encoded transmission data including a continuous sequence of them. The encode unit 13 can also compress them as a single unit, and encrypt them. The transmit unit 14 of the mobile transmitter then modulates a carrier with the transmission data, and transmits the transmission data by radiating the modulated



radio waves by way of the antenna 15.

The receive unit 32 of the receiver 21 mounted on the vehicle demodulates the radio waves received by way of the antenna 31 to extract the transmission data from them. The receive unit 32 then furnishes the transmission data to the decode unit 33. The decode unit 33 receives and decodes the transmission data using a decoding method corresponding to the encoding method that the encode unit 13 of the mobile transmitter 1 employs, to transform it to the fingerprint information and the system-specific identifier, and then furnishes the fingerprint information to the fingerprint information holding unit 34. The decode unit 33 also furnishes the identifier to the identifier holding unit 35. The fingerprint information holding unit 34 temporarily latches the fingerprint information from the decode unit. The identifier holding unit 35 temporarily latches the system-specific identifier from the decode unit.

The feature extraction unit 36 reads the fingerprint information from the fingerprint information holding unit 34, and then extracts features from the fingerprint information and furnishes the features to the feature verification unit 38. The feature verification unit 38 sequentially reads one set of previously stored features of an authorized user's fingerprint from the fingerprint information storage unit 37 and then compares the extracted features against the set of features of the authorized user's fingerprint read out of the fingerprint information storage unit 37. In other words, the feature verification unit 38 searches through the fingerprint information storage unit for one set of features that match the extracted features. After the feature verification unit 38

finds a match or completes the verification of the extracted features against all sets of previously stored features of authorized users' fingerprints, it furnishes the verification result to the comprehensively determination unit 41. The fingerprint information storage unit 37 can store a plurality of pieces of fingerprint information about authorized users' fingerprints, instead of a plurality of sets of features of authorized users' fingerprints. In this case, before comparison between the extracted features and any set of features of an authorized user's fingerprint, the features of the authorized user's fingerprint are extracted from a corresponding piece of fingerprint information read out of the fingerprint information storage unit 37.

On the other hand, the identifier verification unit 40 reads the received identifier from the identifier holding unit 35 and reads the system-specific identifier from the identifier storage unit 39. The identifier verification unit 40 then compares the received identifier with the system-specific identifier to determine whether they match, and furnishes the determination result to the comprehensively determination unit 41.

The comprehensively determination unit 41 determines whether or not the user manipulating the mobile transmitter 1 is an authorized user and whether or not the manipulation is directed toward the vehicle 2, according to the verification result from the feature verification unit 38 and the verification result from the identifier verification unit 40. The comprehensively determination unit 41 then furnishes the determination results to the communications unit 42. The communications unit 42 furnishes control signals to the engine

start/stop control unit 22, the door lock/unlock unit 23, and the trunk opening control unit 24, respectively, according to the determination results from the comprehensively determination unit 41.

5           For example, when the user manipulating the mobile transmitter 1 is an authorized user and when the manipulation is directed toward the vehicle 2, the communications unit 42 furnishes a control signal to allow the user to start the engine to the engine start/stop control unit 22, a control signal to  
10 allow the user to release the lock of doors to the door lock/unlock unit 23, and a control signal to allow the user to release the lock of the trunk to the trunk opening control unit 24.

As previously mentioned, in accordance with the first  
15 embodiment of the present invention, the vehicle key system can provide the mobile transmitter 1 with a system-specific identifier, transmit fingerprint information captured, together with the identifier, to the receiver 21 mounted on the vehicle, verify the captured fingerprint information against  
20 a list of pieces of previously stored fingerprint information, verify the received identifier against a previously stored identifier, and control pieces of equipment in the vehicle according to the verification results. Accordingly, the present embodiment can offer an advantage of providing a vehicle  
25 key system that, when an authorized user manipulates a mobile transmitter to use a specific vehicle, makes it possible to control only the vehicle on which a receiver corresponding to the mobile transmitter is mounted.

Referring next to Fig. 2, there is illustrated a block diagram showing the structure of a vehicle key system according to a second embodiment of the present invention. In the figure, the same reference numerals as shown in Fig. 1 denote the same components as of the above-mentioned first embodiment, and therefore the description of those components will be omitted hereinafter. In Fig. 2, reference numeral 13A denotes an encode unit for encoding only fingerprint information captured by a fingerprint sensor 11, only an identifier specific to the system, or both of them to transform it or them into encoded transmission data according to selection of information to be verified from the fingerprint information and the identifier, numeral 14A denotes a radio communications unit for transmitting the transmission data and for transmitting or receiving data-selection indicating data indicating the selection of information to be verified from the fingerprint information and the identifier, numeral 16 denotes a data-selection indicating data storage unit for storing the data-selection indicating data whose value is set by an operation unit 18 or which is received by way of the radio communications unit 14A, and numeral 17 denotes a display unit for displaying which information to be verified is selected from the fingerprint information and the identifier, i.e. kinds of information to be verified, which are selected by the user. The operation unit 18 can select only the fingerprint information, only the identifier, or both of them, as information to be verified, from these pieces of information, and set the value of the data-selection indicating data, according to a manipulation performed by the user. Alternatively, an operation unit 44 within a receiver 21 mounted on a vehicle 2 can perform the

selection of information to be verified from the fingerprint information and the identifier. In either case, the data-selection indicating data indicating the selection of information to be verified from the fingerprint information and the identifier can be stored in both the transmitter and the receiver.

The receiver 21 is provided with a radio communications unit 32A for receiving the transmission data and for transmitting or receiving the data-selection indicating data, and a comprehensively determination unit 41A for determining whether or not to enable a plurality of control units 22 to 24, according to a verification result from a feature verification unit 38, a verification result from an identifier verification unit 40, or both of them. Which verification result is used for the comprehensively determination is based on the selection of information to be verified from the fingerprint information and the identifier. The receiver 21 further includes a data-selection indicating data storage unit 43 for storing the data-selection indicating data whose value is set by the operation unit 44 or which is received by way of the radio communications unit 32A. As previously mentioned, the operation unit 44 can select only the fingerprint information, only the identifier, or both of them, as information to be verified, from these pieces of information, and set the value of the data-selection indicating data, according to a manipulation performed by the user.

In operation, when the user touches the fingerprint sensor 11 of the mobile transmitter 1 firmly with a finger, the fingerprint sensor 11 captures fingerprint information from the fingerprint of the user's finger and then furnishes it to the

encode unit 13A. The encode unit 13A reads the data-selection indicating data from the data-selection indicating data storage unit 16. According to the data-selection indicating data, the encode unit 13A then encodes only the fingerprint information, only the identifier, or both of them using a predetermined encoding method to transform it or them to encoded transmission data, and furnishes the transmission data to the radio communications unit 14A. The radio communications unit 14A of the mobile transmitter then modulates a carrier with the transmission data, and transmits the transmission data by radiating the modulated radio waves by way of an antenna 15.

The radio communications unit 32A of the receiver 21 mounted on the vehicle demodulates the radio waves received by way of an antenna 31 to extract the transmission data from them.

The radio communications unit 32A then furnishes the transmission data to the decode unit 33. The decode unit 33 receives and decodes the transmission data using a decoding method corresponding to the encoding method that the encode unit 13A of the mobile transmitter 1 employs. When the decoded data includes the fingerprint information, the decode unit 33 furnishes the fingerprint information to a fingerprint information holding unit 34. When the decoded data includes the identifier, the decode unit 33 furnishes the identifier to an identifier holding unit 35. The fingerprint information holding unit 34 temporarily latches the fingerprint information from the decode unit. The identifier holding unit 35 temporarily latches the system-specific identifier from the decode unit.

A feature extraction unit 36 reads the fingerprint information from the fingerprint information holding unit 34,

and then extracts features from the fingerprint information and furnishes the features to the feature verification unit 38. The feature verification unit 38 sequentially reads one set of previously stored features of an authorized user's fingerprint from a fingerprint information storage unit 37 and then compares the extracted features against the set of features of the authorized user's fingerprint read out of the fingerprint information storage unit 37. In other words, the feature verification unit 38 searches through the fingerprint information storage unit for one set of features that match the extracted features. After the feature verification unit 38 finds a match or completes the verification of the extracted features against all sets of previously stored features of authorized users' fingerprints, it furnishes the verification result to the comprehensively determination unit 41A.

On the other hand, the identifier verification unit 40 reads the received identifier from the identifier holding unit 35 and reads a system-specific identifier from an identifier storage unit 39. The identifier verification unit 40 then compares the received identifier with the system-specific identifier to determine whether they match, and furnishes the determination result to the comprehensively determination unit 41A.

The comprehensively determination unit 41A reads the data-selection indicating data from the data-selection indicating data storage unit 43. Based on the data-selection indicating data, the comprehensively determination unit 41A determines whether or not to enable the plurality of control units 22 to 24, according to the verification result from the feature verification unit 38, the verification result from the

identifier verification unit 40, or both of them. The  
comprehensively determination unit 41A then furnishes the  
determination result to a communications unit 42. The  
communications unit 42 furnishes control signals to the engine  
5 start/stop control unit 22, the door lock/unlock unit 23, and  
the trunk opening control unit 24, respectively, according to  
the determination result from the comprehensively  
determination unit 41A.

Next, a description will be made as to the selection of  
10 information to be verified. The selection of information to  
be verified can be performed according to a manipulation of  
either one of the operation units 18 and 44, which is performed  
by the user. From the viewpoint of the security of the system,  
it is desirable that authentication is carried out to confirm  
15 the identity of the user before such a manipulation is done.

When the user performs a manipulation on the operation  
unit 18, the operation unit 18 selects information to be  
verified from the fingerprint information and the identifier  
according to the manipulation, and stores data-selection  
20 indicating data indicating the selection of information to be  
verified in the data-selection indicating data storage unit 16.  
The radio communications unit 14A transmits the data-selection  
indicating data by way of the antenna 15. The display unit 17  
displays which information to be verified is selected from the  
25 fingerprint information and the identifier according to the  
data-selection indicating data stored in the data-selection  
indicating data storage unit 16. The display unit 17 can be  
constructed of an array of light emitting diodes. As an  
alternative, the display unit 17 can be a liquid crystal  
30 display.



The radio communications unit 32A of the receiver 21 receives the data-selection indicating data by way of the antenna 31, and stores it in the data-selection indicating data storage unit 43.

5           On the other hand, when the user performs a manipulation on the operation unit 44, the operation unit 44 selects information to be verified from the fingerprint information and the identifier according to the manipulation, and stores data-selection indicating data indicating the selection of  
10 information to be verified in the data-selection indicating data storage unit 43. The radio communications unit 32A transmits the data-selection indicating data by way of the antenna 31.

          The radio communications unit 14A of the mobile  
15 transmitter 1 receives the data-selection indicating data by way of the antenna 15, and stores it in the data-selection indicating data storage unit 16. The display unit 17 displays which information to be verified is selected from the fingerprint information and the identifier according to the  
20 data-selection indicating data stored in the data-selection indicating data storage unit 16.

          In this manner, both the mobile transmitter 1 and the receiver 21 can share the same data-selection indicating data. According to the data-selection indicating data, only the  
25 fingerprint information, only the identifier, or both of them are selected as information to be verified which will be used for the verification of the identity of the user.

          Using either one of the operation units 18 and 44, the user can select between all information use, fingerprint  
30 information verification off, fingerprint information delete,

and identifier verification off modes in the receiver 21.

Referring next to Fig. 3, there is illustrated a state transition diagram showing transitions between these processing modes. The fingerprint information delete mode is a processing mode in which all pieces of fingerprint information (i.e. all sets of features stored in the feature storage unit 37) are deleted and the verification unit is enabled to verify the identity of the received identifier, whereas the verification unit is disabled to verify the identity of the

received fingerprint information. In the fingerprint information delete mode, any user with an authorized mobile transmitter can operate the vehicle without the verification of the user's fingerprint. For example, by switching to the fingerprint information delete mode prior to shipment of a vehicle provided with a receiver according to the second embodiment, any dealer can give any person permission to operate the vehicle without the verification of the user's fingerprint until it is sold. When the owner of a vehicle provided with a receiver according to the second embodiment sells the vehicle, the user can delete the fingerprint information about the user's fingerprint and give any person permission to operate the vehicle without the verification of the user's fingerprint, by switching to the fingerprint information delete mode.

The all information use mode is a processing mode in which the verification unit is enabled to verify the received fingerprint information and the received identifier against a list of pieces of previously stored fingerprint information and a previously stored identifier, respectively. In this mode, if no fingerprint information is stored in the feature storage unit 37, features, which are extracted from the received

fingerprint information stored in the fingerprint information holding unit 34 by the feature extracting unit 36, can be stored in the feature storage unit 37.

The fingerprint information verification off mode is a processing mode in which the verification unit is enabled to verify the identity of the received identifier, whereas the verification unit is disabled to verify the identity of the received fingerprint information. The identifier verification off mode is a processing mode in which the verification unit is enabled to verify the identity of the received fingerprint information, whereas the verification unit is disabled to verify the identity of the received identifier.

In the exemplary embodiment shown, the user can select kinds of information to be verified by manipulating either the operation unit 18 of the mobile transmitter 1 or the operation unit 44 of the receiver 21. In a variant, only one of the mobile transmitter 1 and the receiver 21 includes such the operation unit.

As previously mentioned, in accordance with the second embodiment of the present invention, the vehicle key system can select information to be verified from the fingerprint information and the identifier, and switch to the fingerprint information verification off mode in which the verification unit is enabled to verify the identity of the received identifier, whereas the verification unit is disabled to verify the identity of the received fingerprint information, when the user makes a request of an outsider who is not an authorized user, such as a clerk at a dealer or a door man at a hotel, to manage the vehicle temporarily, for example, and switch to the

identifier verification off mode in which the verification unit is enabled to verify the identity of the received fingerprint information, whereas the verification unit is disabled to verify the identity of the received identifier, when a plurality  
5 of vehicles are managed in a commuter system, thereby providing security according to the circumstances and improving the convenience of the system.

In addition, since the mobile transmitter includes the display unit 17 for displaying kinds of information to be  
10 verified, the second embodiment offers an advantage of making it possible for the user to easily recognize the kinds of information to be verified.

Either a control switch included in the vehicle, such as a wiper switch, or a pedal, such as an acceleration pedal, can  
15 also serve as the operation unit 44. As an alternative, an operation unit intended for a navigation device, which provides a variety of navigation services, such as guidance on a route from a current position to a destination, for users, can also serve as the operation unit 44. In either case, no additional  
20 operation unit is needed and therefore the cost of the vehicle key system can be reduced.

The vehicle key system according to the above-mentioned first embodiment can include an operation unit having the same structure and function as the operation unit 18 or 44. In this  
25 case, the vehicle key system can allow the user to select between the processing modes in the receiver 21, like that of the second embodiment.

Many widely different embodiments of the present invention may be constructed without departing from the spirit  
30 and scope of the present invention. It should be understood

that the present invention is not limited to the specific embodiments described in the specification, except as defined in the appended claims.

## WHAT IS CLAIMED IS:

1. A vehicle key system for verifying identity of fingerprint information about a user's fingerprint and for  
5 controlling pieces of equipment in a vehicle according to a verification result, said system comprising:

a transmitter including a fingerprint information capturing means for capturing fingerprint information from a user's fingerprint, and a transmitting means for transmitting  
10 the fingerprint information captured by said fingerprint information capturing means together with a system-specific identifier; and

a receiver disposed in the vehicle, including a receiving means for receiving the fingerprint information and the  
15 identifier transmitted from said transmitting means of said transmitter, a verification means for verifying the received fingerprint information against a list of pieces of previously stored fingerprint information, and for verifying the received identifier against a previously stored identifier, and a  
20 control means for controlling said pieces of equipment in the vehicle according to verification results from said verification means.

2. A vehicle key system for verifying identity of fingerprint information about a user's fingerprint and for  
25 controlling pieces of equipment in a vehicle according to a verification result, said system comprising:

a transmitter including a fingerprint information capturing means for capturing fingerprint information from a  
30 user's fingerprint, and a transmitting means for transmitting

information including at least one of the fingerprint information captured by said fingerprint information capturing means and a system-specific identifier;

5 a receiver disposed in the vehicle, including a receiving means for receiving the information from said transmitting means of said transmitter, a verification means for, when the received information includes the captured fingerprint information, verifying the received fingerprint information against a list of pieces of previously stored fingerprint  
10 information, and for, when the received information includes the system-specific identifier, verifying the received identifier against a previously stored identifier, and a control means for controlling said pieces of equipment in the vehicle according to at least a verification result from said  
15 verification means; and

a transmission information selecting means for selecting, as the information to be transmitted by said transmitting means, only the fingerprint information, only the system-specific identifier, and both of them, according to a manipulation  
20 performed by the user.

3. The vehicle key system according to Claim 2, wherein said transmitter includes a display means for displaying kinds of the information selected by said transmission information  
25 selecting means.

4. The vehicle key system according to Claim 2, wherein said transmission information selecting means includes an operation means that is manipulated by the user when selecting  
30 the information to be transmitted by said transmitting means

of said transmitter, and wherein said transmitter further comprises a selection information holding means for holding selection information indicating the selected information, and said receiver further comprises a selection information holding means for holding selection information indicating the selected information.

5. The vehicle key system according to Claim 4, wherein said transmitter includes said operation means.

6. The vehicle key system according to Claim 4, wherein said receiver includes said operation means.

7. The vehicle key system according to Claim 4, wherein both of said transmitter and said receiver include said operation means.

8. The vehicle key system according to Claim 4, wherein an operation unit intended for operating a piece of equipment disposed in said vehicle also serves as said operation means.

9. The vehicle key system according to Claim 8, wherein said equipment is a navigation device.

10. The vehicle key system according to Claim 4, wherein a pedal disposed in said vehicle also serves as said operation means.

11. The vehicle key system according to Claim 2, wherein if said verification means previously stores no fingerprint



information, when the received information includes the system-specific identifier, said verification means performs only the verification of the received identifier against a previously stored identifier.

5

12. The vehicle key system according to Claim 3, wherein if said verification means previously stores no fingerprint information, when the received information includes the system-specific identifier, said verification means performs only the verification of the received identifier against a previously stored identifier.

13. The vehicle key system according to Claim 4, wherein if said verification means previously stores no fingerprint information, when the received information includes the system-specific identifier, said verification means performs only the verification of the received identifier against a previously stored identifier.

14. The vehicle key system according to Claim 5, wherein if said verification means previously stores no fingerprint information, when the received information includes the system-specific identifier, said verification means performs only the verification of the received identifier against a previously stored identifier.

15. The vehicle key system according to Claim 6, wherein if said verification means previously stores no fingerprint information, when the received information includes the system-specific identifier, said verification means performs

only the verification of the received identifier against a previously stored identifier.

16. The vehicle key system according to Claim 7, wherein  
5 if said verification means previously stores no fingerprint information, when the received information includes the system-specific identifier, said verification means performs only the verification of the received identifier against a previously stored identifier.

10 17. The vehicle key system according to Claim 8, wherein if said verification means previously stores no fingerprint information, when the received information includes the system-specific identifier, said verification means performs  
15 only the verification of the received identifier against a previously stored identifier.


18. The vehicle key system according to Claim 9, wherein  
20 if said verification means previously stores no fingerprint information, when the received information includes the system-specific identifier, said verification means performs only the verification of the received identifier against a previously stored identifier.

25 19. The vehicle key system according to Claim 10, wherein if said verification means previously stores no fingerprint information, when the received information includes the system-specific identifier, said verification means performs only the verification of the received identifier against a  
30 previously stored identifier.

## ABSTRACT OF THE DISCLOSURE

A vehicle key system comprises a mobile transmitter including a fingerprint information capturing unit for capturing fingerprint information from a user's fingerprint, and a transmit unit for transmitting the fingerprint information captured by the fingerprint information capturing unit together with a system-specific identifier. A receiver disposed in a vehicle includes a receive unit for receiving the fingerprint information and the identifier transmitted from the transmit unit of the mobile transmitter, a verification unit for verifying the fingerprint information against a list of pieces of previously stored fingerprint information, and for verifying the received identifier against a previously stored identifier, and a control unit for controlling pieces of equipment in the vehicle according to verification results from the verification unit.

FIG. 1

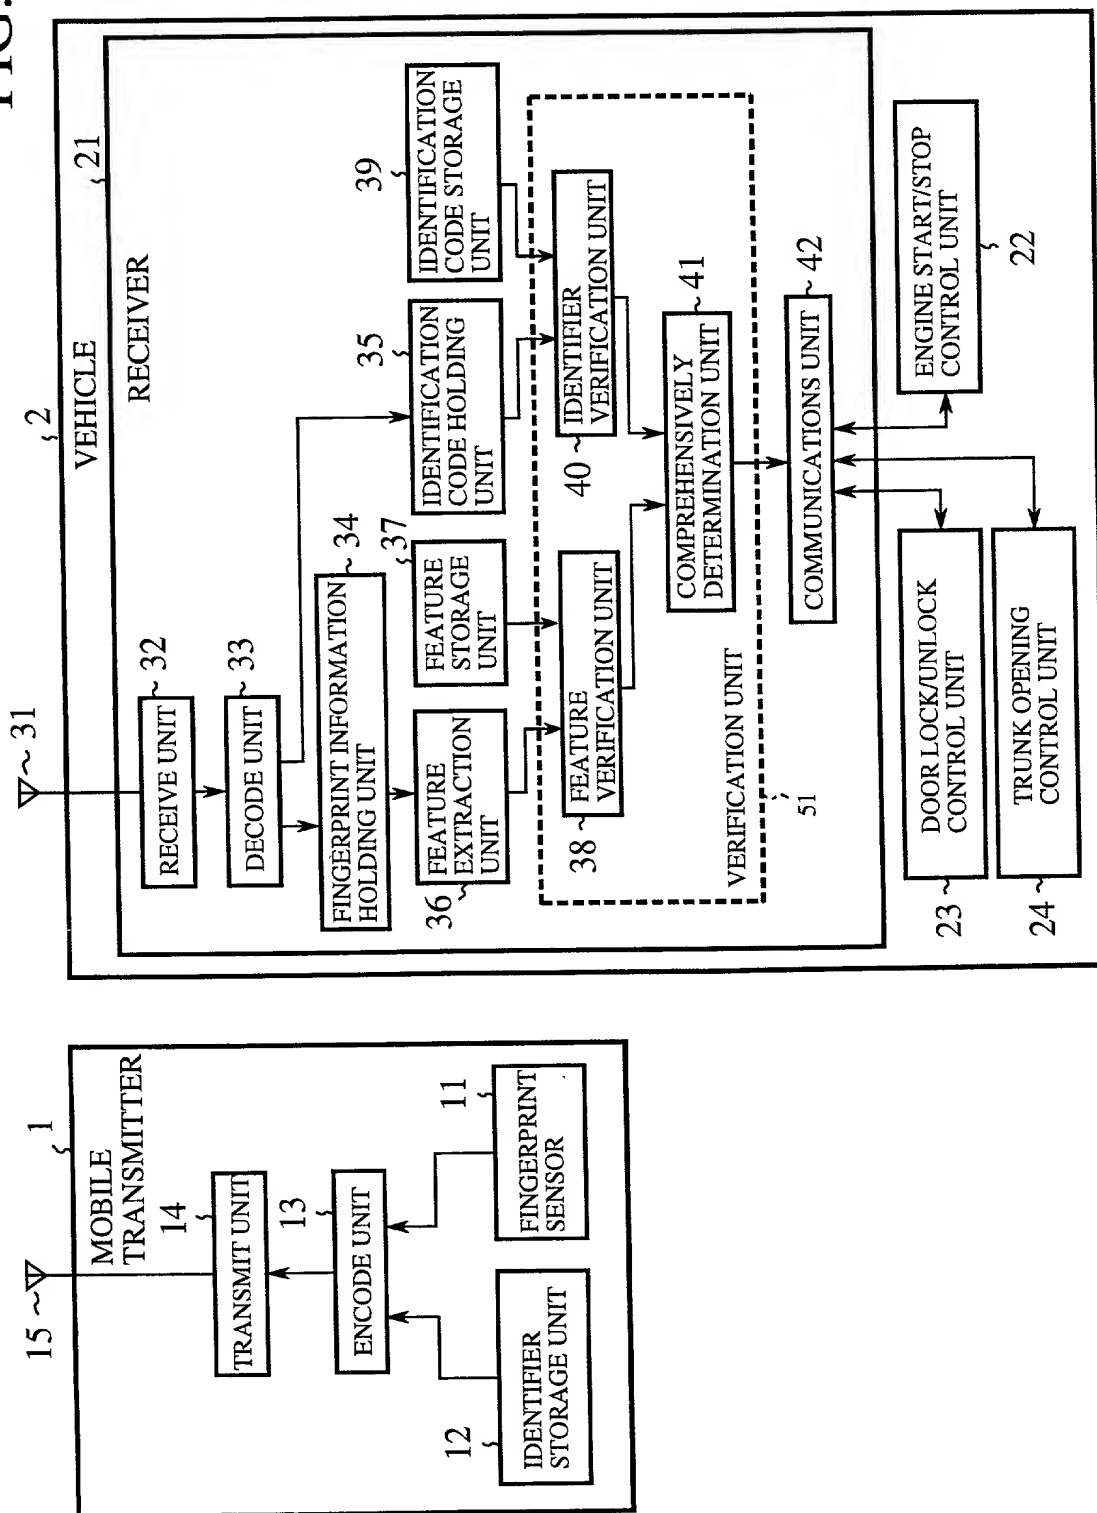


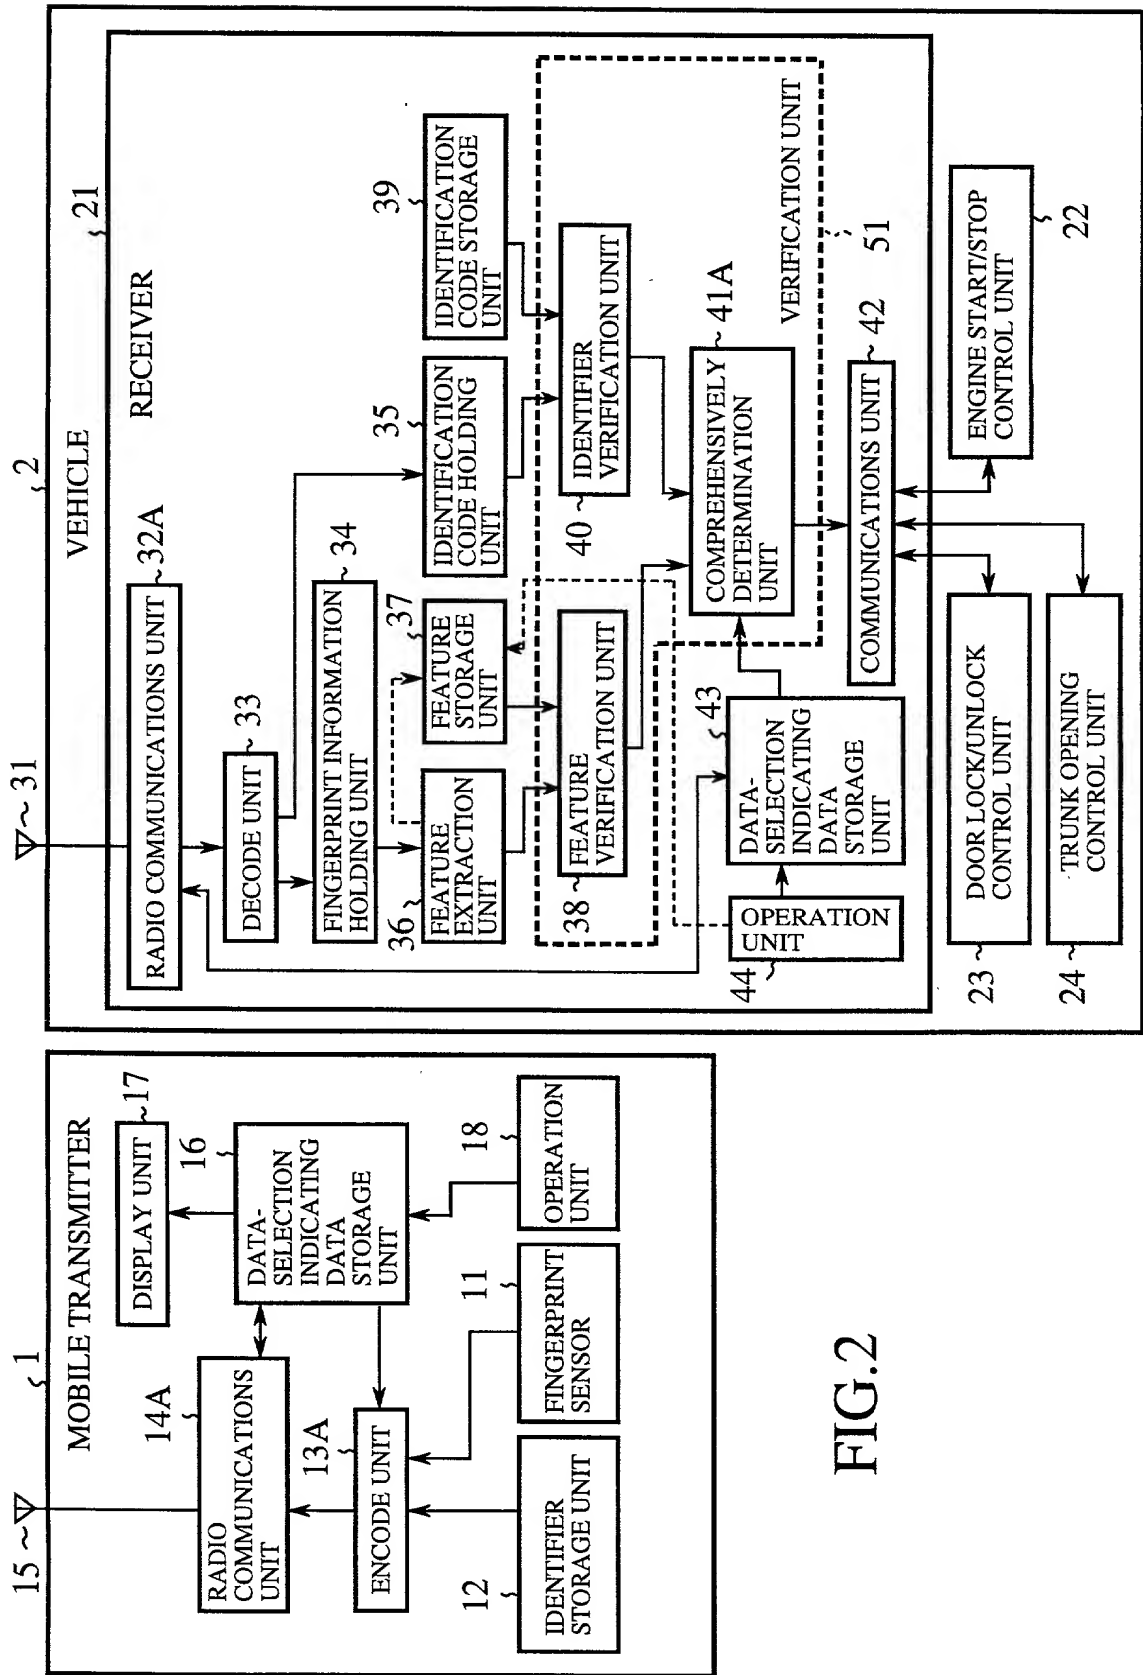


FIG.3

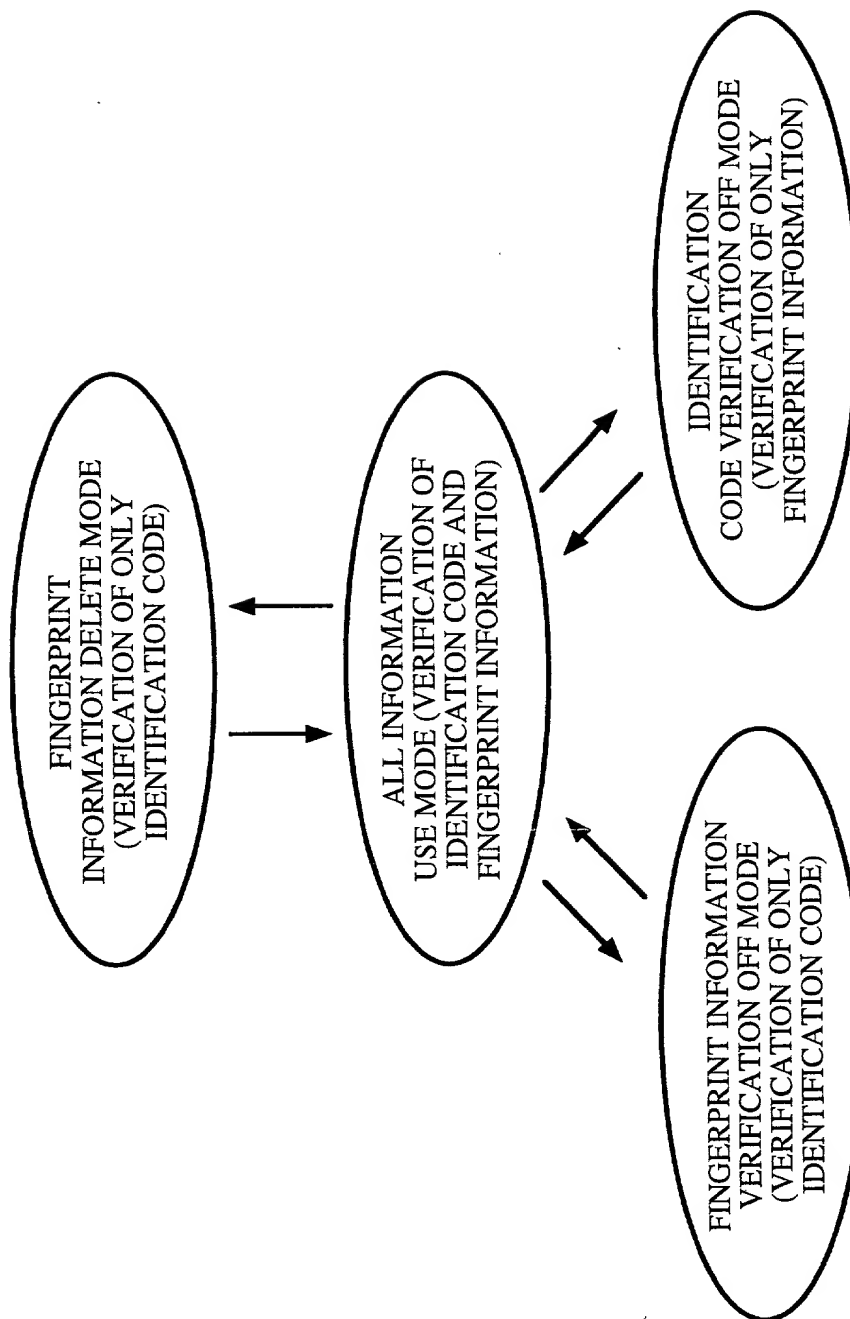

# Declaration and Power of Attorney for Patent Application

特許出願宣言書

## Japanese Language Declaration

私は、下欄に氏名を記載した発明として、以下の通り宣言する：

私の住所、郵便の宛先および国籍は、下欄に氏名に続いて記載したとおりであり、

名称の発明に関し、請求の範囲に記載した特許を求める主題の本来の、最初にして唯一の発明者である（一人の氏名のみが下欄に記載されている場合）か、もしくは本来の、最初にして共同の発明者である（複数の氏名が下欄に記載されている場合）と信じ、

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

"VEHICLE KEY SYSTEM"

その明細書を  
(該当するほうに印を付す)

☐ ここに添付する。

☐ \_\_\_\_\_ 日に出版番号

第 \_\_\_\_\_ 号として提出し、

\_\_\_\_\_ 日に補正した。  
(該当する場合)

the specification of which  
(check one)

☒ is attached hereto.

☐ was filed on \_\_\_\_\_ as

Application Serial No. \_\_\_\_\_

and was amended on \_\_\_\_\_  
(if applicable)

私は、前記のとおり補正した請求の範囲を含む前記明細書の内容を検討し、理解したことを陳述する。

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第37部第1章第56条(a)項に従い、本願の審査に所要の情報を開示すべき義務を有することを認める。

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

# Japanese Language Declaration

私は、合衆国法典第35部第119条、第172条、又は第365条に基づく下記の外国特許出願又は発明者証出願の外国優先権利益を主張し、さらに優先権の主張に係わる基礎出願の出願日前の出願日を有する外国特許出願又は発明者証出願を以下に明記する：

Prior foreign applications  
先の外国出願

I hereby claim foreign priority benefits under Title 35, United States Code §119, §172 or §365 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

2000-78941	JAPAN	21/3/2000	Priority claimed 優先権の主張	
(Number) (番号)	(Country) (国名)	(Day/Month/Year Filed) (出願の年月日)	<input checked="" type="checkbox"/> Yes あり	<input type="checkbox"/> No なし
(Number) (番号)	(Country) (国名)	(Day/Month/Year Filed) (出願の年月日)	<input type="checkbox"/> Yes あり	<input type="checkbox"/> No なし
(Number) (番号)	(Country) (国名)	(Day/Month/Year Filed) (出願の年月日)	<input type="checkbox"/> Yes あり	<input type="checkbox"/> No なし
(Number) (番号)	(Country) (国名)	(Day/Month/Year Filed) (出願の年月日)	<input type="checkbox"/> Yes あり	<input type="checkbox"/> No なし
(Number) (番号)	(Country) (国名)	(Day/Month/Year Filed) (出願の年月日)	<input type="checkbox"/> Yes あり	<input type="checkbox"/> No なし

私は、合衆国法典第35部第120条に基づく下記の合衆国特許出願の利益を主張し、本願の請求の範囲各項に記載の主題が合衆国法典第35部第112条第1項に規定の態様で先の合衆国出願に開示されていない限度において、先の出願の出願日と本願の国内出願日又はPCT国際出願日の間に公表された連邦規則法典第37部第1章第56条(a)項に記載の所要の情報を開示すべき義務を有することを認める。

I hereby claim the benefit of Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose any material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial No.) (出願番号)	(Filing Date) (出願日)	(現況) (Status)
(Application Serial No.) (出願番号)	(Filing Date) (出願日)	(現況) (Status)

私は、ここに自己の知識に基づいて行った陳述がすべて真実であり、自己の有する情報及び信ずるところに従って行った陳述が真実であると信じ、更に故意に虚偽の陳述等を行った場合、合衆国法典第18部第1001条により、罰金もしくは禁固に処せられるか、又はこれらの刑が併科され、又はかかる故意による虚偽の陳述が本願ないし本願に対して付与される特許の有効性を損なうことがあることを認識して、以上の陳述を行ったことを宣言する。

I hereby declare that all statements made herein of my own knowledge are true; and further that all statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.



# Japanese Language Declaration

委任状： 私は、下記発明者として、以下の代理人をここに  
選任し、本願の手続きを遂行すること並びにこれに関する一  
切の行為を特許商標局に対して行うことを委任する。  
(代理人氏名及び登録番号を明記のこと)

POWER OF ATTORNEY: As a named inventor, I hereby  
appoint the following attorney(s) and/or agent(s) to  
prosecute this application and transact all business in the  
Patent and Trademark Office connected therewith (list  
name and registration number)

I hereby appoint John H. Mion, Reg. No. 18,879; Donald E. Zinn, Reg. No. 19,046; Thomas J. Macpeak, Reg. No. 19,292;  
Robert J. Seas, Jr., Reg. No. 21,092; Darryl Mexic, Reg. No. 23,063; Robert V. Sloan, Reg. No. 22,775; Peter D. Olexy, Reg.  
No. 24,513; J. Frank Osha, Reg. No. 24,625; Waddell A. Biggart, Reg. No. 24,861; Robert G. McMorow, Reg. No. 19,093;  
Louis Gubinsky, Reg. No. 24,835; Neil B. Siegel, Reg. No. 25,200; David J. Cushing, Reg. No. 28,703; John R. Inge, Reg. No.  
26,916; Joseph J. Ruch, Jr., Reg. No. 26,577; Sheldon I. Landsman, Reg. No. 25,430; Richard C. Turner, Reg. No. 29,710;  
Howard L. Bernstein, Reg. No. 25,665; Alan J. Kasper, Reg. No. 25,426; Kenneth J. Burchfiel, Reg. No. 31,333; Gordon Kit,  
Reg. No. 30,764; Susan J. Mack, Reg. No. 30,951; Frank L. Bernstein, Reg. No. 31,484; Mark Boland, Reg. No. 32,197; William  
H. Mandir, Reg. No. 32,156; Scott M. Daniels, Reg. No. 32,562; Brian W. Hannon, Reg. No. 32,778; Abraham J. Rosner, Reg.  
No. 33,276; Bruce E. Kramer, Reg. No. 33,725; Paul F. Neils, Reg. No. 33,102; and Brett S. Sylvester, Reg. No. 32,765, my  
attorneys to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith, and  
request that all correspondence about the application be addressed to SUGHRUE, MION, ZINN, MACPEAK & SEAS, PLLC, 2100  
Pennsylvania Avenue, N.W., Washington, D.C. 20037-3202.

書類の送付先：

Send Correspondence to:

SUGHRUE, MION, ZINN, MACPEAK & SEAS  
2100 Pennsylvania Avenue, N.W., Washington, D.C. 20037

直通電話連絡先： (名称及び電話番号)

Direct Telephone Calls to: (name and telephone number)

(202)293-7060

唯一の又は第一の発明者の氏名	Full name of sole or first inventor	
	Hisashi ISHIKURA	
同発明者の署名	日付	Inventor's signature Date
		Hisashi Ishikura August 11, 2000
住所	Residence	
	Tokyo, Japan	
国籍	Citizenship	
	Japanese	
郵便の宛先	Post office address	
	c/o MITSUBISHI DENKI KABUSHIKI KAISHA	
	2-3, Marunouchi 2-chome, Chiyoda-ku, Tokyo 100-8310 Japan	
第二の共同発明者の氏名 (該当する場合)	Full name of second joint inventor, if any	
	Hirofumi TATSUKAWA	
同第二発明者の署名	日付	Second inventor's signature Date
		Hirofumi Tatsukawa August 11, 2000
住所	Residence	
	Tokyo, Japan	
国籍	Citizenship	
	Japanese	
郵便の宛先	Post office address	
	c/o MITSUBISHI DENKI KABUSHIKI KAISHA	
	2-3, Marunouchi 2-chome, Chiyoda-ku, Tokyo 100-8310 Japan	

(第三又はそれ以降の共同発明者に対しても同様な情報  
および署名を提供すること。)

(Supply similar information and signature for third and  
subsequent joint inventors.)

第三の共同発明者の氏名 (該当する場合)		Full name of third joint inventor, if any	
		Masaru FUKU	
同第三発明者の署名	日付	Third inventor's signature	Date
		Masaru Fuku	August 11, 2000
住所		Residence	
		Tokyo, Japan	
国籍		Citizenship	
		Japanese	
郵便の宛先		Post office address	
		c/o MITSUBISHI DENKI KABUSHIKI KAISHA	
		2-3, Marunouchi 2-chome, Chiyoda-ku, Tokyo 100-8310 Japan	
第四の共同発明者の氏名 (該当する場合)		Full name of fourth joint inventor, if any	
		Keiichi ENOKI	
同第四発明者の署名	日付	Fourth inventor's signature	Date
		Keiichi Enoki	August 11, 2000
住所		Residence	
		Tokyo, Japan	
国籍		Citizenship	
		Japanese	
郵便の宛先		Post office address	
		c/o MITSUBISHI DENKI KABUSHIKI KAISHA	
		2-3, Marunouchi 2-chome, Chiyoda-ku, Tokyo 100-8310 Japan	
第五の共同発明者の氏名 (該当する場合)		Full name of fifth joint inventor, if any	
		Toru MORITA	
同第五発明者の署名	日付	Fifth inventor's signature	Date
		Toru Morita	August 11, 2000
住所		Residence	
		Tokyo, Japan	
国籍		Citizenship	
		Japanese	
郵便の宛先		Post office address	
		c/o MITSUBISHI DENKI KABUSHIKI KAISHA	
		2-3, Marunouchi 2-chome, Chiyoda-ku, Tokyo 100-8310 Japan	
第六の共同発明者の氏名 (該当する場合)		Full name of sixth joint inventor, if any	
		Fumitaka SATOU	
同第六発明者の署名	日付	Sixth inventor's signature	Date
		Fumitaka Satou	August 11, 2000
住所		Residence	
		Tokyo, Japan	
国籍		Citizenship	
		Japanese	
郵便の宛先		Post office address	
		c/o MITSUBISHI DENKI KABUSHIKI KAISHA	
		2-3, Marunouchi 2-chome, Chiyoda-ku, Tokyo 100-8310 Japan	

第七の共同発明者の氏名（該当する場合）		Full name of seventh joint inventor, if any	
		Koji NAGAO	
同第七発明者の署名	日付	Seventh inventor's signature	Date
		Koji Nagao	August 11, 2000
住所		Residence	Tokyo, Japan
国籍		Citizenship	Japanese
郵便の宛先		Post office address	c/o MITSUBISHI DENKI KABUSHIKI KAISHA
			2-3, Marunouchi 2-chome, Chiyoda-ku, Tokyo 100-8310 Japan
第八の共同発明者の氏名（該当する場合）		Full name of eighth joint inventor, if any	
同第八発明者の署名	日付	Eighth inventor's signature	Date
住所		Residence	
国籍		Citizenship	
郵便の宛先		Post office address	
第九の共同発明者の氏名（該当する場合）		Full name of ninth inventor, if any	
同第九発明者の署名	日付	Ninth inventor's signature	Date
住所		Residence	
国籍		Citizenship	
郵便の宛先		Post office address	
第十の共同発明者の氏名（該当する場合）		Full name of tenth joint inventor, if any	
同第十発明者の署名	日付	Tenth inventor's signature	Date
住所		Residence	
国籍		Citizenship	
郵便の宛先		Post office address	